




- **Following norm** EN 574 Type IIIA
- **Approved from** TÜV
- **Operating temperature range:** -10°C to +50 °C
- **Operating pressure range:** 2.5 to 8 bar
- **Flow rate at 6 bar Δp 1 bar:** 85 NI/min
- **Syncronisation, max time distance between two signals:** 0,4 s
- **Accessories:** adaptor for DIN rail



Valve

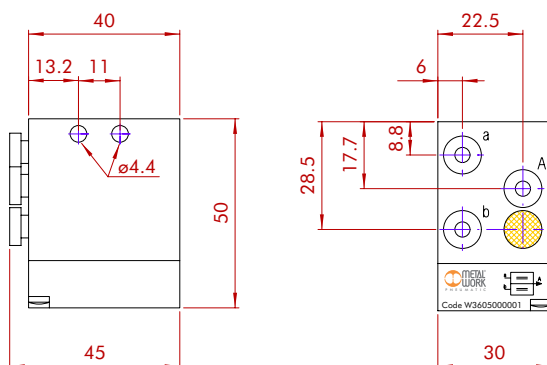

Push-button board

Complete with:

- box in cast alloy
- nr° 1 bimanual safety valve
- nr° 2 manual valves VME with monostable guarded push-button
- nr° 1 shut off valve VME complete mushroom with emergency block

